venco

www.venco.com.au

DIRECT DRIVE GLIDE

CLAYCORE PTY LTD

47 Newbey St

Milpara, WA 6330

ABN: 69 634 757 029

venco

www.venco.com.au

PLEASE READ THESE SAFETY INSTRUCTIONS CAREFULLY

⚠ USE WITH RCD PROTECTED OUTLETS ONLY.IF YOU ARE UNSURE ASK AN ELECTRICIAN OR USE A STAND ALONE PLUG-IN SAFETY SWITCH.

⚠ DO NOT OPERATE ELECTRICAL SWITCHES WITH WET HANDS.

⚠ ENSURE WHEEL IS SWITCHED OFF AND UNPLUGGED FROM POWER SOURCE BEFORE CLEANING OR MAINTENANCE AND AFTER OPERATION.

⚠ NEVER TAMPER WITH ANY OF THE ELECTRICAL COMPONENTS OF THE WHEEL AS THERE IS A RISK OF AN ELECTRIC SHOCK.

⚠ TO CLEAN THE WHEEL, USE A WET SPONGE. DO NOT USE A PRESSURISED WATER SOURCE IN THE VICINITY OF THE MACHINE eg. GARDEN HOSE

⚠ DO NOT BLOCK OFF DRAINAGE SPOUT AS THIS COULD RESULT IN WATER INGRESS TO THE MOTOR.

⚠ THIS WHEEL WEIGHS 32 KGS. HANDLE WITH CARE WHEN MOVING OR LIFTING. IT IS RECOMMENDED THAT TWO PEOPLE HANDLE THIS WHEEL.

⚠ ENSURE LONG HAIR AND LOOSE CLOTHING ARE SECURED.

⚠ ENSURE MACHINE IS OPERATED ON A FLAT AND LEVEL SURFACE, INDOORS.

⚠ ENSURE CHILDREN ARE NOT LEFT UNATTENDED NEAR THE MACHINE.

⚠ ENSURE TOOLS AND ANY SMALL PARTS ARE OUT OF REACH OF CHILDREN

⚠ STOP OPERATION OF THE MACHINE IF SMOKE IS DETECTED OR THERE ARE UNUSUAL NOISES.

⚠DO NOT INSERT HANDS OR OBJECTS INTO OPENINGS OR MOVING PARTS.

⚠ REPAIR OR MODIFICATION OF THE WHEEL IS PROHIBITED

venco

www.venco.com.au

USER CONTROLS

- THE POWER BUTTON ON THE LEFT OF THE CONTROL SURFACE IS USED TO SWITCH THE MACHINE FROM STANDBY TO ACTIVE.

- THE RED STAND BY LED INDICATES THE MACHINE IS POWERED ON FROM A 240V MAIN SOURCE BUT CANNOT BE USED.

- THE GREEN ACTIVE LED INDICATES THE MACHINE IS POWERED ON AND WILL RESPOND TO THE FOOT PEDAL. FOR THE MACHINE TO RUN, THE FOOT PEDAL MUST BE CYCLED BACK TO THE OFF POSITION. (HEEL DOWN/TOE UP)

- THE FWD/REV BUTTON CHANGES THE DIRECTION OF WHEELHEAD ROTATION. BY DEFAULT THE MACHINE WILL SPIN COUNTER CLOCKWISE, HOWEVER WHILST THE MACHINE REMAINS POWERED ON IN THE ACTIVE STATE IT WILL REMEMBER ITS LAST DIRECTION OF TRAVEL AND DEFAULT TO THAT.

www.venco.com.au

QUICK SET UP

1. ADJUST THE FOUR MAIN FEET USING SPANNER TO ENSURE LEVEL.
IF THE FOOT AT THE REAR OF THE MACHINE NEEDS ADJUSTMENT, THE LOWER COVER FASTENERS X 3 WILL NEED TO BE REMOVED AND THE COVER FLEXED OUT OF THE WAY TO GAIN ACCESS.
REFER TO PHOTOS BELOW.

2. PLUG IN TO POWER OUTLET ONLY-DO NOT PLUG IN TO EXTENSION CORD.

3.ALWAYS WAIT FOR THE WHEELHEAD TO STOP ROTATING COMPLETELY BEFORE CHANGING DIRECTION.

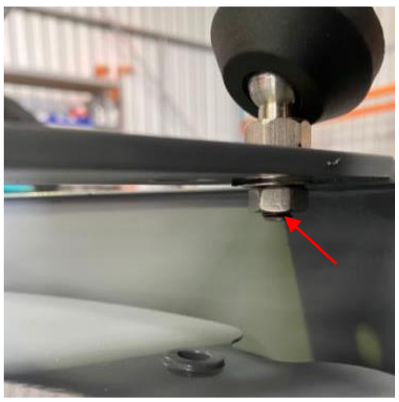

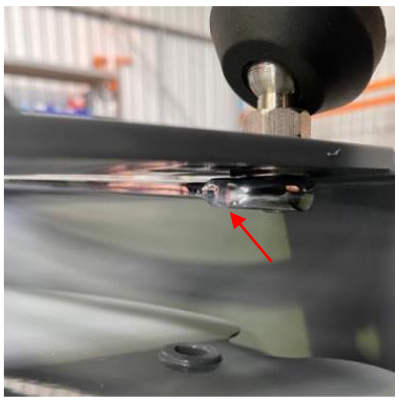

THANK YOU FOR PURCHASING A VENCO DIRECT DRIVE GLIDE AND SUPPORTING AUSTRALIAN MANUFACTURING.